

# PANA9600X

## Automatic Nucleic Acid Workstation

All innovation for boosting your lab efficiency with simplified workflow

PANA 9600X automatic nucleic acid workstation is designed based on magnetic beads method and rotary nucleic acid extraction technology. It integrates the workflow of automatic capping/decapping for sample tubes, sample information scanning, sample loading, nucleic acid extraction, and PCR system setup, which makes your experiment easy to start and greatly saves time for professionals. With compatible nucleic acid extraction kits, the nucleic acids needed can be extracted quickly and efficiently from various sample types including whole blood, serum, plasma and swab scrub solution for specific downstream applications.

1 Automated Capping/Decapping for Sample Tubes

2 Sample Information Scanning

3 Sample Loading

4 Nucleic Acid Extraction

5 PCR System Set Up



### Highly automated workflow and rapid extraction

With one-key operation, automatic capping/decapping for sample tubes, sample information scanning, sample loading, nucleic acid extraction, and PCR system setup for 96 samples can be finished within 40-80 min (relying on the reagent)

### More reliable results you can depend on

With precise sample loading, accurate temperature ramp control, and precise liquid transfer design, consistent and precise results can be ensured for each of your assays

### Smart information technology

Sample information scan; reagent information identification; visualized consumable recognition; easy connection with LIS (laboratory information system)


### Highly flexible for your needs

Compatible with various sample types and extraction kits; 4 PCR systems can be set up at the same time

### Minimized contamination measures

With rotary mixing for nucleic acid extraction, HEPA filter, smart drop capture, strict zoning, and UV disinfection technology, cross-contamination can be reduced to ensure accurate results

## PRINCIPLE

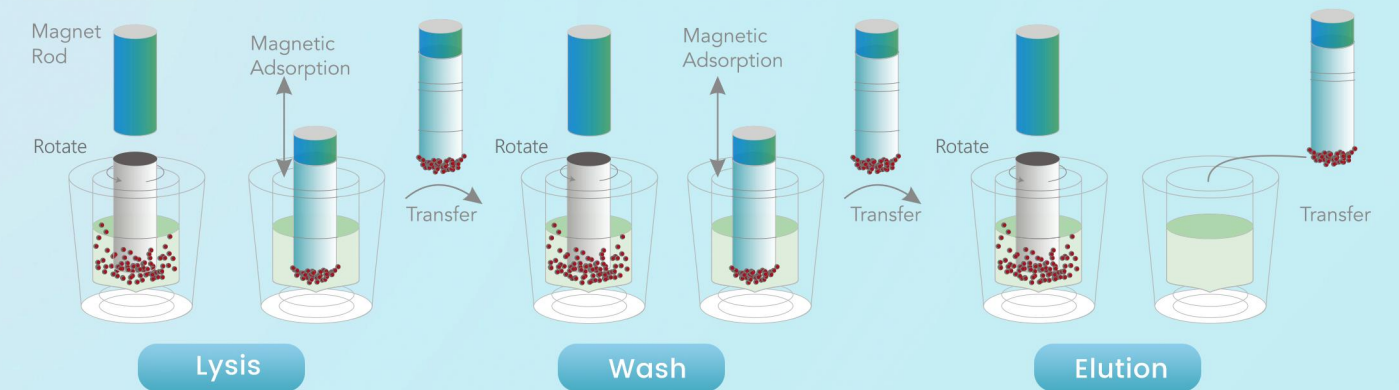

## SPECIFICATIONS

|                            |   |
|----------------------------|---|
| Model                      | PANA9600X   |
| Sample Capacity            | 1-96  |
| Technical Principles       | Magnetic beads method; Rotary nucleic acid extraction technology  |
| Processing Capacity        | Nucleic acid extraction of 96 samples per run; 4 different PCR system can be set up   |
| Sample Types               | Plasma, serum, whole blood, swab scrub solution, etc.   |
| Sample Loading Channels    | 4   |
| Pipetting Range            | 1µL-1000µL  |
| Pipetting Performance      | Below 15 µL: accuracy: A≤2.0%, repeatability: CV≤3.0%;<br>15 µL to 50 µL: accuracy: A≤1.5%, repeatability: CV≤1.5%;<br>Above 50 µL: accuracy: A≤1.0%, repeatability: CV≤1.2%.                                     |
| Liquid Level Detection     | CapSense/Gas pressure sensor  |
| Sample Tubes               | Compatible with standard blood collection tube, various thread sampling tube, etc.  |
| Temperature Control        | Lysis and elution, temperature flexible to control between 35°C and 120°C   |
| Extraction Consumables     | 96 deep-well plates, 6 strip tubes  |
| Information Tool           | Barcode scanning for reagent identification; visualized consumable recognition  |
| PCR reagent chamber        | Avoid light design; power-on automatic refrigeration (4°C ~8°C)   |
| PCR Consumables            | Compatible with 0.1mL, 0.2mL 8 strip tube, and 96-well plates   |
| Temperature Accuracy       | ≤2.0°C  |
| Temperature Uniformity     | ±1.2°C  |
| Minimized Contamination    | Anti-droplet: air tightness and anti-droplet design and an external droplet design;<br>Strict zoning;<br>Directional exhaust;<br>HEPA filter;<br>UV disinfection  |
| Information Technology     | Scanning the bar codes of multiple samples one by one while sample holder is loaded<br>Information connection of Sample tube-Deep well plate-PCR tube<br>Easy connection with LIS (laboratory information system) |
| Device General Information | 1370mm(L)*810mm(W)*960mm(H); 235kg(net);<br>12.1-inch touch screen  |
| Interfaces                 | Ethernet, USB   |
| Power Supply               | AC 100-240V, 50-60Hz  |

Version 2.0

All rights reserved by Tianlong. February 22, 2024

## FEATURES



Tianlong Science and Technology

Mail: inquiry@medtl.com  
Phone: 86 029 82682132  
Website: www.medtl.net  
Address: No. 4266 Shanglin Road, Xi'an, China